



Ref. Certif. No.

JPTUV-063366

IEC SYSTEM FOR MUTUAL RECOGNITION OF TEST  
CERTIFICATES FOR ELECTRICAL EQUIPMENT  
(IECEE) CB SCHEME

SYSTEME CEI D'ACCEPTATION MUTUELLE DE  
CERTIFICATS D ESSAIS DES EQUIPEMENTS  
ELECTRIQUES (IECEE) METHODE OC

**CB TEST CERTIFICATE****CERTIFICAT D'ESSAI OC**

Product  
Produit

Polymer lithium ion battery pack

Name and address of the applicant  
Nom et adresse du demandeur

Shenzhen Sinoming Technology Co., Ltd.  
14-201, 3 Building, 2nd Yard, Fruit  
Street, Renming Bei Road, Dongmen Street, Luohu District, Shenzhen  
City, Guangdong Province, P.R. China

Name and address of the manufacturer  
Nom et adresse du fabricant

Shenzhen Sinoming Technology Co., Ltd.  
No. 3, Tianlong Lane, Qingshui Rd.,  
Longxi Community, Longcheng Street, Longgang District, Shenzhen  
City, P.R. China

Name and address of the factory  
Nom et adresse de l'usine

Shenzhen Sinoming Technology Co., Ltd.  
No. 3, Tianlong Lane, Qingshui Rd.,  
Longxi Community, Longcheng Street, Longgang District, Shenzhen  
City, P.R. China

Ratings and principal characteristics  
Valeurs nominales et caractéristiques principales

3.7V, 2850mAh, 10.54Wh

Trademark (if any)  
Marque de fabrique (si elle existe)

Type of Manufacturer's Testing Laboratories used  
Type de programme du laboratoire d'essais constructeur

N/A

Model / Type Ref.  
Ref. de type

113465

Additional information (if necessary may also be  
reported on page 2)  
Les informations complémentaires (si nécessaire,  
peuvent être indiqués sur la 2<sup>ème</sup> page)

A sample of the product was tested and found  
to be in conformity with  
Un échantillon de ce produit a été essayé et a été  
considéré conforme à la

IEC 62133:2012  
National differences see test report

As shown in the Test Report Ref. No. which forms part  
of this Certificate  
Comme indiqué dans le Rapport d'essais numéro de  
référence qui constitue partie de ce Certificat

17047573 001


This CB Test Certificate is issued by the National Certification Body  
Ce Certificat d'essai OC est établi par l'Organisme National de Certification



TÜV Rheinland Japan Ltd.  
Global Technology Assessment Center  
4-25-2 Kita-Yamata, Tsuzuki-ku  
Yokohama 224-0021 Japan  
Phone + 81 45 914-3888  
Fax + 81 45 914-3354  
Mail: info@jpn.tuv.com  
Web: www.tuv.com

Date: 27.05.2015

Signature:

  
Dipl.-Ing. (FH) C. Padel



Test Report issued under the responsibility of:



**TEST REPORT  
IEC 62133**

**Secondary cells and batteries containing alkaline or other non-acid electrolytes – Safety requirements for portable sealed secondary cells, and for batteries made from them, for use in portable applications**

Report Number. ....: 17047573 001

Date of issue .....: 2015-05-26

Total number of pages..... 25 pages

Applicant's name.....: Shenzhen Sinoming Technology Co., Ltd.

Address .....: 14-201, 3 Building, 2nd Yard, Fruit Street, Renming Bei Road, Dongmen Street, Luohu District, Shenzhen City, Guangdong Province, P.R. China

**Test specification:**

Standard .....: IEC 62133: 2012 (Second Edition)

Test procedure .....: CB Scheme

Non-standard test method.....: N/A

Test Report Form No.....: IEC62133B

Test Report Form(s) Originator ....: UL(Demko)

Master TRF.....: Dated 2013-03

**Copyright © 2013 Worldwide System for Conformity Testing and Certification of Electrotechnical Equipment and Components (IECEE), Geneva, Switzerland. All rights reserved.**

This publication may be reproduced in whole or in part for non-commercial purposes as long as the IECEE is acknowledged as copyright owner and source of the material. IECEE takes no responsibility for and will not assume liability for damages resulting from the reader's interpretation of the reproduced material due to its placement and context.

If this Test Report Form is used by non-IECEE members, the IECEE/IEC logo and the reference to the CB Scheme procedure shall be removed.

**This report is not valid as a CB Test Report unless signed by an approved CB Testing Laboratory and appended to a CB Test Certificate issued by an NCB in accordance with IECEE 02.**

Test item description .....: Polymer lithium ion battery pack

Trade Mark .....: N/A

Manufacturer.....: Shenzhen Sinoming Technology Co., Ltd.

Address .....: No. 3, Tianlong Lane, Qingshui Rd., Longxi Community, Longcheng Street, Longgang District, Shenzhen City, P.R. China


Model/Type reference .....: 113465

Ratings .....: 3.7V, 2850mAh, 10.54Wh

<b>Testing procedure and testing location:</b>		
<input checked="" type="checkbox"/>	<b>CB Testing Laboratory:</b>	<b>TÜV Rheinland (Shenzhen) Co., Ltd.</b>
<b>Testing location/ address .....</b>		3&4 F, Cybio Technology Building No. 1, Langshan No. 2 Road South, 5th Industrial Area, High-Tech Industry Park North, Nanshan District, 518057 Shenzhen, P.R. China
<input type="checkbox"/>	<b>Associated CB Testing Laboratory:</b>	
<b>Testing location/ address .....</b>		
<b>Tested by (name + signature).....:</b>		Maggie Guo
<b>Approved by (name + signature) .....</b>		Charlie Zeng
		<i>Maggie Guo</i>
		<i>Charlie Zeng</i>
<input type="checkbox"/>	<b>Testing procedure: TMP</b>	
<b>Testing location/ address .....</b>		
<b>Tested by (name + signature).....:</b>		
<b>Approved by (name + signature) .....</b>		
<input type="checkbox"/>	<b>Testing procedure: WMT</b>	
<b>Testing location/ address .....</b>		
<b>Tested by (name + signature).....:</b>		
<b>Witnessed by (name + signature) .....</b>		
<b>Approved by (name + signature) .....</b>		
<input type="checkbox"/>	<b>Testing procedure: SMT</b>	
<b>Testing location/ address .....</b>		
<b>Tested by (name + signature).....:</b>		
<b>Approved by (name + signature) .....</b>		
<b>Supervised by (name + signature).....:</b>		

<p><b>List of Attachments (including a total number of pages in each attachment):</b> Attachment 1: Photo documentation (3 pages).</p>	
<p><b>Summary of testing:</b></p>	
<p><b>Tests performed (name of test and test clause):</b>  cl.5.6.2 Design recommendation(Lithium system);  cl.8.1 Charging procedure for test purposes (for Cell and Pack);  cl.8.2.1 Continuous charging at constant voltage (Cells);  cl.8.3.1 External short circuit (Cells);  cl.8.3.2 External short circuit (Battery);  cl.8.3.3 Free fall;  cl.8.3.4 Thermal abuse (Cells);  cl.8.3.5 Crush (Cells);  cl.8.3.6 Over-charging of battery;  cl.8.3.7 Forced discharge (Cells);  cl.8.3.8 Transport tests (Cells);</p> <p>Tests are made with the number of cells and batteries specified in IEC 62133: 2012 (Second Edition) Table 2.</p>	<p><b>Testing location:</b>  <b>TÜV Rheinland (Shenzhen) Co., Ltd.</b>  3&amp;4 F, Cybio Technology Building No. 1, Langshan No. 2 Road South, 5th Industrial Area, High-Tech Industry Park North, Nanshan District, 518057 Shenzhen, P.R. China</p>
<p><b>Summary of compliance with National Differences:</b>  BE, BY, CN, DE, DK, FI, GB, HU, NL, NO, SE, SG  BE=Belgium, BY=Belarus, CN=China, DE=Germany, DK=Denmark, FI=Finland, GB=United Kingdom, HU=Hungary, NL=The Netherlands, NO=Norway, SE=Sweden, SG=Singapore.</p> <p><input checked="" type="checkbox"/> The product fulfils the requirements of <u>EN 62133: 2013</u></p>	

Copy of marking plate:

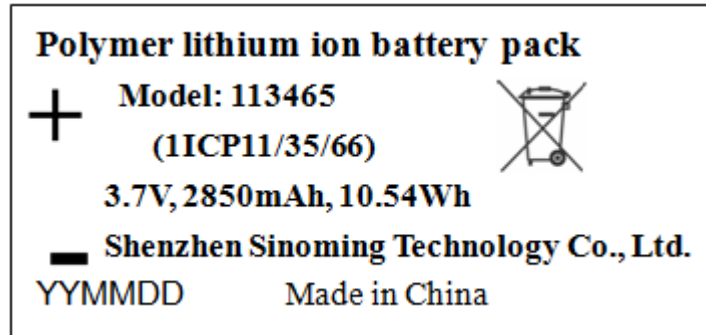

Remark: For the YYMMDD, YY is for years, MM is for months, DD is for day.

<b>Test item particulars.....:</b>	
<b>Classification of installation and use.....:</b>	To be defined in final product
<b>Supply connection.....:</b>	DC connector
<b>Recommend charging method declared by the manufacturer .....</b>	Charging the battery with 570mA constant current until 4.2V, then constant voltage until charge current reduces to 57mA at ambient 20°C±5°C
<b>Discharge current (0,2 I<sub>t</sub> A) .....</b>	570mA
<b>Specified final voltage.....:</b>	3.0V
<b>Chemistry .....</b>	<input type="checkbox"/> nickel systems ..... <input checked="" type="checkbox"/> lithium systems
<b>Recommend of charging limit for lithium system</b>	
<b>Upper limit charging voltage per cell.....:</b>	4.25V
<b>Maximum charging current .....</b>	1425mA
<b>Charging temperature upper limit .....</b>	45°C
<b>Charging temperature lower limit.....:</b>	10°C
<b>Polymer cell electrolyte type .....</b>	<input type="checkbox"/> gel polymer <input type="checkbox"/> solid polymer <input checked="" type="checkbox"/> N/A
<b>Possible test case verdicts:</b>	
- test case does not apply to the test object.....:	N/A
- test object does meet the requirement.....:	P (Pass)
- test object does not meet the requirement.....:	F (Fail)
<b>Testing.....:</b>	
<b>Date of receipt of test item .....</b>	2015-04-23
<b>Date (s) of performance of tests .....</b>	2015-04-23 to 2015-05-14
<b>General remarks:</b>	
The test results presented in this report relate only to the object tested. This report shall not be reproduced, except in full, without the written approval of the Issuing testing laboratory. "(See Enclosure #)" refers to additional information appended to the report. "(See appended table)" refers to a table appended to the report. <b>Throughout this report a <input type="checkbox"/> comma / <input checked="" type="checkbox"/> point is used as the decimal separator.</b>	
<b>Manufacturer's Declaration per sub-clause 4.2.5 of IEC 60335-1:</b>	
The application for obtaining a CB Test Certificate includes more than one factory location and a declaration from the Manufacturer stating that the sample(s) submitted for evaluation is (are) representative of the products from each factory has been provided ..... :	<input type="checkbox"/> <b>Yes</b> <input checked="" type="checkbox"/> <b>Not applicable</b>
<b>When differences exist; they shall be identified in the General product information section.</b>	
<b>Name and address of factory (ies).....:</b>	Same as manufacturer

**General product information:**

The battery pack is constructed with one rechargeable Li-ion cell in 1S1P, and has overcharge, over-discharge, over current and short-circuits protection circuit.

The main features of the battery pack are shown as below (clause 8.1.1):

Model	Nominal capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Cut-off Voltage
113465	2850mAh	3.7V	570mA	570mA	1425mA	1425mA	4.2V	3.0V

The main features of the battery pack are shown as below (clause 8.1.2):


Model	Upper limit charge voltage	Taper-off current	Lower charge temperature	Upper charge temperature
113465	4.25V	142.5mA	10°C	45°C


The main features of the cell in the battery pack are shown as below (clause 8.1.1):

Model	Nominal capacity	Nominal voltage	Nominal Charge Current	Nominal Discharge Current	Maximum Charge Current	Maximum Discharge Current	Maximum Charge Voltage	Cut-off Voltage
113465(cell)	2850mAh	3.7V	570mA	570mA	1425mA	1425mA	4.2V	3.0V

The main features of the cell in the battery are shown as below (clause 8.1.2):

Model	Upper limit charge voltage	Taper-off current	Lower charge temperature	Upper charge temperature
113465(cell)	4.25V	142.5mA	10°C	45°C

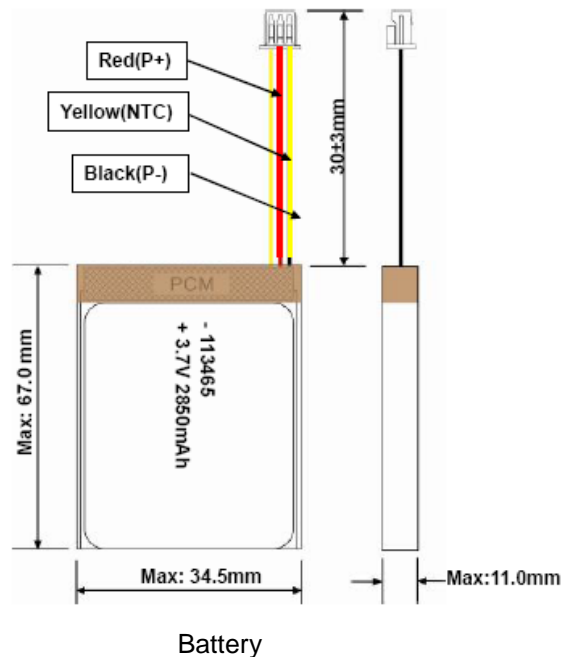
**Construction:**

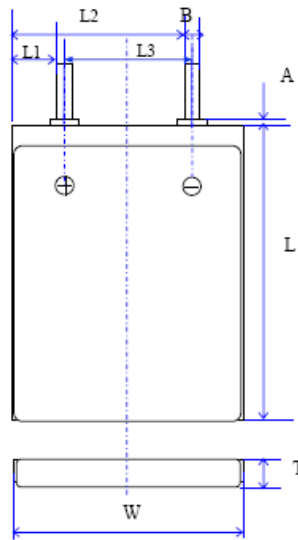


Items	Description	Dimension and Spec
T	Thickness	11.0mm max
W	Width	34.5mm max
L	Length	65.5mm max
A	Sealant Length	16.0±2.0mm
B	Tab width	5.0±0.1mm
L1		6.0±2mm
L2		17.0±2mm
L3		7.6~18.3mm

Cell

Circuit diagram:

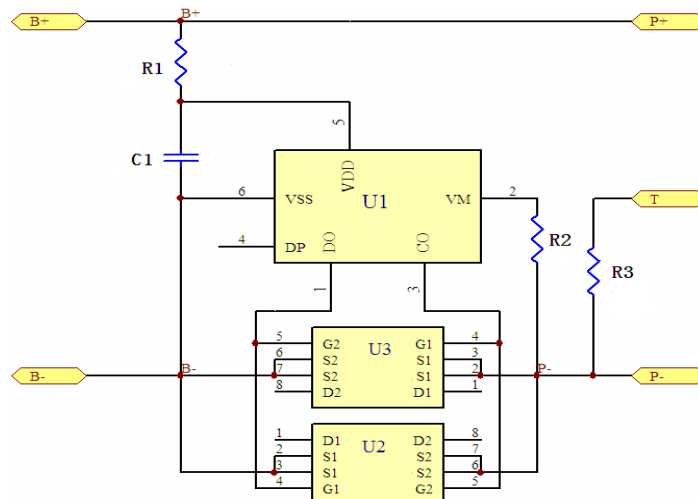

Remark: Some components are alternate in the above circuit. Please see the Table (Critical components information) in this report for details.



IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
<b>4</b>	<b>Parameter measurement tolerances</b>		<b>P</b>
	Parameter measurement tolerances		P
<b>5</b>	<b>General safety considerations</b>		<b>P</b>
5.1	General		P
5.2	Insulation and wiring		P
	The insulation resistance between the positive terminal and externally exposed metal surfaces of the battery (excluding electrical contact surfaces) is not less than 5 MΩ	No metal case exists.	N/A
	Insulation resistance (MΩ) .....		—
	Internal wiring and insulation are sufficient to withstand maximum anticipated current, voltage and temperature requirements		P
	Orientation of wiring maintains adequate creepage and clearance distances between conductors		P
	Mechanical integrity of internal connections accommodates reasonably foreseeable misuse		P
5.3	Venting		P
	Battery cases and cells incorporate a pressure relief mechanism or are constructed so that they relieve excessive internal pressure at a value and rate that will preclude rupture, explosion and self-ignition	Venting mechanism exists on the narrow side of pouch cell.	P
	Encapsulation used to support cells within an outer casing does not cause the battery to overheat during normal operation nor inhibit pressure relief		N/A
5.4	Temperature/voltage/current management		P
	Batteries are designed such that abnormal temperature rise conditions are prevented	Overcharge, overdischarge, over current and short-circuit proof circuit used in this battery. See tests of clause 8.	P
	Batteries are designed to be within temperature, voltage and current limits specified by the cell manufacturer	See above.	P
	Batteries are provided with specifications and charging instructions for equipment manufacturers so that associated chargers are designed to maintain charging within the temperature, voltage and current limits specified	The charging limits are specified in the manufacturer's specifications.	P
5.5	Terminal contacts		P
	Terminals have a clear polarity marking on the external surface of the battery	DC connector contacts comply with the requirements.	P
	The size and shape of the terminal contacts ensure that they can carry the maximum anticipated current	DC connector contacts comply with the requirements.	P

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
	External terminal contact surfaces are formed from conductive materials with good mechanical strength and corrosion resistance		P
	Terminal contacts are arranged to minimize the risk of short circuits		P
5.6	Assembly of cells into batteries		P
5.6.1	If there is more than one battery housed in a single battery case, cells used in the assembly of each battery have closely matched capacities, be of the same design, be of the same chemistry and be from the same manufacturer	Only one cell in battery	N/A
	Each battery has an independent control and protection		N/A
	Manufacturers of cells make recommendations about current, voltage and temperature limits so that the battery manufacturer/designer may ensure proper design and assembly		N/A
	Batteries that are designed for the selective discharge of a portion of their series connected cells incorporate separate circuitry to prevent the cell reversal caused by uneven discharges		N/A
	Protective circuit components are added as appropriate and consideration given to the end-device application		N/A
	When testing a battery, the manufacturer of the battery provides a test report confirming the compliance according to this standard		N/A
5.6.2	Design recommendation for lithium systems only		P
	For the battery consisting of a single cell or a single cellblock: - Charging voltage of the cell does not exceed the upper limit of the charging voltage specified in Clause 8.1.2, Table 4; or	Charging voltage: 4.2V, not exceed 4.25V specified in Clause 8.1.2, Table 4.	P
	- Charging voltage of the cell does not exceed the different upper limit of the charging voltage determined through Clause 8.1.2, NOTE 1.		N/A
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - The voltages of any one of the single cells or single cellblocks does not exceed the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, by monitoring the voltage of every single cell or the single cellblocks; or		N/A

<b>IEC 62133: 2012</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	- The voltages of any one of the single cells or single cellblocks does not exceed the different upper limit of the charging voltage, determined through Clause 8.1.2, NOTE 1, by monitoring the voltage of every single cell or the single cellblocks		N/A
	For the battery consisting of series-connected plural single cells or series-connected plural cellblocks: - Charging is stopped when the upper limit of the charging voltage, specified in Clause 8.1.2, Table 4, is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks; or		N/A
	- Charging is stopped when the upper limit of the different charging voltage, determined through Clause 8.1.2, NOTE 1, is exceeded for any one of the single cells or single cellblocks by measuring the voltage of every single cell or the single cellblocks		N/A
5.7	Quality plan		P
	The manufacturer prepares and implements a quality plan that defines procedures for the inspection of materials, components, cells and batteries and which covers the whole process of producing each type of cell or battery	Complied. ISO 9001: 2008 certificate provided.	P
<b>6</b>	<b>Type test conditions</b>		<b>P</b>
	Tests were made with the number of cells or batteries specified in Table 1 for nickel-cadmium and nickel-metal hydride systems and Table 2 for lithium systems, using cells or batteries that are not more than six months old	Complied. Lithium system.	P
	Unless noted otherwise in the test methods, testing was conducted in an ambient of 20°C ± 5°C.	Tests are carried out at 20°C ± 5°C.	P
<b>7</b>	<b>Specific requirements and tests (nickel systems)</b>		<b>N/A</b>
7.1	Charging procedure for test purposes	Lithium system.	N/A
7.2	Intended use		N/A
7.2.1	Continuous low-rate charging (cells)		N/A
	Results: No fire. No explosion		N/A
7.2.2	Vibration		N/A
	Results: No fire. No explosion. No leakage	(See Table 7.2.2)	N/A
7.2.3	Moulded case stress at high ambient temperature		N/A
	Oven temperature (°C) .....		—
	Results: No physical distortion of the battery casing resulting in exposure if internal components		N/A

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
7.2.4	Temperature cycling		N/A
	Results: No fire. No explosion. No leakage.		N/A
7.3	Reasonably foreseeable misuse		N/A
7.3.1	Incorrect installation cell		N/A
	The test was carried out using: - Four fully charged cells of the same brand, type, size and age connected in series, with one of them reversed; or		N/A
	- A stabilized dc power supply.		N/A
	Results: No fire. No explosion..... :	(See Table 7.3.1)	N/A
7.3.2	External short circuit		N/A
	The cells or batteries were tested until one of the following occurred: - 24 hours elapsed; or		N/A
	- The case temperature declined by 20% of the maximum temperature rise		N/A
	Results: No fire. No explosion..... :	(See Table 7.3.2)	N/A
7.3.3	Free fall		N/A
	Results: No fire. No explosion.		N/A
7.3.4	Mechanical shock (crash hazard)		N/A
	Results: No fire. No explosion. No leakage.		N/A
7.3.5	Thermal abuse		N/A
	Oven temperature (°C)..... :		—
	Results: No fire. No explosion.		N/A
7.3.6	Crushing of cells		N/A
	The crushing force was released upon: - The maximum force of 13 kN ± 1 kN has been applied; or		N/A
	- An abrupt voltage drop of one-third of the original voltage has been obtained		N/A
	The cell is prismatic type and a second set of samples was tested, rotated 90° around longitudinal axis compared to the first set		N/A
	Results: No fire. No explosion..... :	(See Table 7.3.6)	N/A
7.3.7	Low pressure		N/A
	Chamber pressure (kPa)..... :		—
	Results: No fire. No explosion. No leakage.		N/A
7.3.8	Overcharge		N/A
	Results: No fire. No explosion..... :	(See Table 7.3.8)	N/A

<b>IEC 62133: 2012</b>			
Clause	Requirement + Test	Result - Remark	Verdict
7.3.9	Forced discharge		N/A
	Results: No fire. No explosion..... :	(See Table 7.3.9)	N/A
<b>8</b>	<b>Specific requirements and tests (lithium systems)</b>		<b>P</b>
8.1	Charging procedures for test purposes		P
8.1.1	First procedure: This charging procedure applied to tests other than those specified in 8.1.2	Complied.	P
8.1.2	Second procedure: This charging procedure applied to the tests of 8.3.1, 8.3.2, 8.3.4, 8.3.5, and 8.3.9		P
	If a cell's specified upper and/or lower charging temperature exceeds values for the upper and/or lower limit test temperatures of Table 4, the cells were charged at the specified values plus 5 °C for the upper limit and minus 5 °C for the lower limit	45°C test used for upper limit tests; 10°C test used for lower limit tests.	N/A
	A valid rationale was provided to ensure the safety of the cell (see Figure A.1) .....		N/A
	For a different upper limit charging voltage (i.e. other than for lithium cobalt oxide systems at 4,25 V), the applied upper limit charging voltage and upper limit charging temperatures were adjusted accordingly	Lithium cobalt oxide systems, 4.25V applied.	N/A
	A valid rationale was provided to ensure the safety of the cell (see Figure A.1) .....		N/A
8.2	Intended use		P
8.2.1	Continuous charging at constant voltage (cells)		P
	Results: No fire. No explosion..... :	(See Table 8.2.1)	P
8.2.2	Moulded case stress at high ambient temperature (battery)	No moulded case exists.	N/A
	Oven temperature (°C) .....		N/A
	Results: No physical distortion of the battery casing resulting in exposure if internal components		N/A
8.3	Reasonably foreseeable misuse		P
8.3.1	External short circuit (cell)		P
	The cells were tested until one of the following occurred: - 24 hours elapsed; or		N/A
	- The case temperature declined by 20% of the maximum temperature rise		P
	Results: No fire. No explosion..... :	(See Table 8.3.1)	P
8.3.2	External short circuit (battery)		P

IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
	The cells were tested until one of the following occurred: - 24 hours elapsed; or		P
	- The case temperature declined by 20% of the maximum temperature rise		N/A
	In case of rapid decline in short circuit current, the battery pack remained on test for an additional one hour after the current reached a low end steady state condition		P
	Results: No fire. No explosion..... :		P
8.3.3	Free fall		P
	Results: No fire. No explosion.	No fire. No explosion.	P
8.3.4	Thermal abuse (cells)		P
	The cells were held at 130°C ± 2°C for: - 10 minutes; or		P
	- 30 minutes for large cells (gross mass of more than 500 g as defined in IEC 62281)		N/A
	Oven temperature ( ) .....	130°C	P
	Gross mass of cell (g) .....	<500g, small cell.	P
	Results: No fire. No explosion.		P
8.3.5	Crush (cells)		P
	The crushing force was released upon: - The maximum force of 13 kN ± 1 kN has been applied; or		P
	- An abrupt voltage drop of one-third of the original voltage has been obtained; or		N/A
	- 10% of deformation has occurred compared to the initial dimension		N/A
	Results: No fire. No explosion..... :	(See Table 8.3.5)	P
8.3.6	Over-charging of battery		P
	Test was continued until the temperature of the outer casing: - Reached steady state conditions (less than 10°C change in 30-minute period); or		N/A
	- Returned to ambient		P
	Results: No fire. No explosion..... :		P
8.3.7	Forced discharge (cells)		P
	Results: No fire. No explosion..... :	(See Table 8.3.7)	P
8.3.8	Transport tests		P

<b>IEC 62133: 2012</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Manufacturer's documentation provided to show compliance with UN Recommendations on Transport of Dangerous Goods	T-1, T-2, T-3 and T-4 tested complied. No leakage, no venting, no short-circuit, no rupture, no explosion and no fire. T-5, See Table 8.3.8. T-6, Taking 13kN as testing condition, refer to 8.3.5 for the testing result.	P
8.3.9	Design evaluation – Forced internal short circuit (cells)	The applicant declares that this battery isn't to be sold in France, Japan, Republic of Korea and Switzerland.	N/A
	The cells complied with national requirement for ..... :		—
	The pressing was stopped upon: - A voltage drop of 50 mV has been detected; or		N/A
	- The pressing force of 800 N (cylindrical cells) or 400 N (prismatic cells) has been reached		N/A
	Results: No fire ..... :		N/A
<b>9</b>	<b>Information for safety</b>		<b>P</b>
	The manufacturer of secondary cells ensures that information is provided about current, voltage and temperature limits of their products.	Information for safety mentioned in manufacturer's specifications.	P
	The manufacturer of batteries ensures that equipment manufacturers and, in the case of direct sales, end-users are provided with information to minimize and mitigate hazards.	Information for safety mentioned in manufacturer's specifications.	P
	Systems analyses performed by device manufacturers to ensure that a particular battery design prevents hazards from occurring during use of a product		N/A
	As appropriate, information relating to hazard avoidance resulting from a system analysis is provided to the end user ..... :		N/A
<b>10</b>	<b>Marking</b>		<b>P</b>
10.1	Cell marking	The final product is battery.	N/A
	Cells marked as specified in the applicable cell standards: IEC 61951-1, IEC 61951-2 or IEC 61960.		N/A
10.2	Battery marking		P
	Batteries marked in accordance with the requirements for the cells from which they are assembled.	The battery is marked in accordance with IEC 61960, also see page 4.	P

<b>IEC 62133: 2012</b>			
Clause	Requirement + Test	Result - Remark	Verdict
	Batteries marked with an appropriate caution statement.		N/A
10.3	Other information		P
	Storage and disposal instructions marked on or supplied with the battery.	Information for disposal instructions mentioned in manufacturer's specifications.	P
	Recommended charging instructions marked on or supplied with the battery.	Information for recommended charging instructions mentioned in manufacturer's specifications.	P

<b>11</b>	<b>Packaging</b>		<b>P</b>
	The materials and packaging design are chosen so as to prevent the development of unintentional electrical conduction, corrosion of the terminals and ingress of environmental contaminants.		P

<b>Annex A</b>	<b>Charging range of secondary lithium ion cells for safe use</b>		<b>P</b>
A.1	General		P
A.2	Safety of lithium-ion secondary battery	Complied.	P
A.3	Consideration on charging voltage	Complied.	P
A.3.1	General	Charging voltage is 4.2V	P
A.3.2	Upper limit charging voltage	4.25V	P
A.3.2.1	General		P
A.3.2.2	Explanation of safety viewpoint		N/A
A.3.2.3	Safety requirements, when different upper limit charging voltage is applied		N/A
A.4	Consideration of temperature and charging current		P
A.4.1	General		P
A.4.2	Recommended temperature range	See A.4.2.2.	P
A.4.2.1	General		P
A.4.2.2	Safety consideration when a different recommended temperature range is applied	Charging temperature declared by client is: 10-45°C.	N/A
A.4.3	High temperature range	Charging high temperature declared by client is: 45°C.	N/A
A.4.3.1	General		N/A
A.4.3.2	Explanation of safety viewpoint		N/A
A.4.3.3	Safety considerations when specifying charging conditions in high temperature range		N/A



IEC 62133: 2012			
Clause	Requirement + Test	Result - Remark	Verdict
A.4.3.4	Safety consideration when specifying new upper limit in high temperature range		N/A
A.4.4	Low temperature range	Charging low temperature declared by client is: 10°C.	N/A
A.4.4.1	General		N/A
A.4.4.2	Explanation of safety viewpoint		N/A
A.4.4.3	Safety considerations, when specifying charging conditions in low temperature range		N/A
A.4.4.4	Safety considerations when specifying a new lower limit in the low temperature range		N/A
A.4.5	Scope of the application of charging current		P
A.5	Sample preparation		N/A
A.5.1	General		N/A
A.5.2	Insertion procedure for nickel particle to generate internal short		N/A
	The insertion procedure carried out at 20°C±5°C and under -25 °C of dew point		N/A
A.5.3	Disassembly of charged cell		N/A
A.5.4	Shape of nickel particle		N/A
A.5.5	Insertion of nickel particle to cylindrical cell		N/A
A.5.5.1	Insertion of nickel particle to winding core		N/A
A.5.5.2	Mark the position of nickel particle on the both end of winding core of the separator		N/A
A.5.6	Insertion of nickel particle to prismatic cell		N/A

TABLE: Critical components information					P
Object/part no.	Manufacturer/trademark	Type/model	Technical data	Standard	Mark(s) of conformity <sup>1)</sup>
Lead wire (Red & Black)	DONGGUAN WENCHANG ELECTRONIC CO LTD	1571	24AWG, VW-1, 80°C, 30Vac	UL 758	UL E214500
Terminal connector	ZHEJIANG JINDA ELECTRONICS CO LTD	Molex51021-3P	PA66, PIN=2.54, V-0	--	--
PCM	Shenzhen Meiyadi Electronics Co Ltd	TS-3810-A0	Overcharge detection voltage: 4.280±0.035V, Over-discharge detection voltage: 3.00±0.08V, Over-current detection current: 1.2-2.8A	--	--
PCB	Shenzhen Meiyadi Electronics Co Ltd	MYD-1	V-0, 130°C	UL 796	UL E348865
MOSFET	MT	8205A TSSOT-8	V <sub>DS</sub> : 20V, V <sub>GS</sub> : ±10V, I <sub>D</sub> : 6A, T <sub>J</sub> : -55-150°C	--	Tested with appliance
Control IC	Seiko	S-8261ABJMD-G3J SOT-23-6	Overcharge detection voltage: 4.280V, Overdischarge detection voltage: 3.00V, Overcurrent detection voltage: 0.080V, Topr: 40°~85°C	--	Tested with appliance
Cell	Shenzhen Sinoming Technology Co., Ltd.	113465(cell)	3.7V, 2850mAh	IEC 62133: 2012	Tested with appliance
-Electrolyte	Zhangjiagang Guotai Huarong New Chemical Materials Co., Ltd.	4275C	LiPF6 dissolved in organic solvent (EC+ DMC)	--	--
-Separator	Foshan Jinhui Hi-Tech Optoelectronic Material Co., Ltd.	JHA16	PE, thickness 16±3µm Shutdown Temp:132~134°C, Melt Temp ≥145°C	--	--
-Positive electrode	Shenzhen Sinoming Technology Co., Ltd.	139µm (thickness) × 65.5 mm (width) × 607mm (length)	Positive material LiCoO <sub>2</sub> coated on Al film.	--	--
-Negative electrode	Shenzhen Sinoming Technology Co., Ltd.	154µm (thickness) × 67.0 mm (width) × 540mm (length)	Negative material C coated on Cu film.	--	--
-Positive electrode tab	XiaMen XinTaiBo Science and Technology Ltd.	0.1µm (thickness) × 40mm (width)	Aluminium	--	--

-Negative electrode tab	XiaMen XinTaiBo Science and Technology Ltd.	0.1µm (thickness)x 40mm (width )	Nickle	--	--
-Cell case	Dai Nippon Printing Co., Ltd.	approx.146mm x 125mm x 3.0mm, 0.113mm thickness.	Aluminium plastic film	--	--
Supplementary information: <sup>1)</sup> Provided evidence ensures the agreed level of compliance.					

7.2.1	TABLE: Continuous low rate charge (cells)					N/A
Model	Recommended charging method, (CC, CV, or CC/CV)	Recommended charging voltage $V_c$ , (Vdc)	Recommended charging current $I_{rec}$ , (A)	OCV at start of test, (Vdc)	Results	
<b>Supplementary information:</b> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain)						

7.2.2	TABLE: Vibration			N/A
Model	OCV at start of test, (Vdc)		Results	
<b>Supplementary information:</b> - No fire or explosion - No leakage - Leakage - Fire - Explosion - Bulge - Others (please explain)				

7.3.1	TABLE: Incorrect installation (cells)			N/A
Model	OCV of reversed cell, (Vdc)		Results	

**Supplementary information:**

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

7.3.2	TABLE: External short circuit					N/A
Model	Ambient (at 20°C ± 5°C or 55°C ± 5°C)	OCV at start of test, (Vdc)	Resistance of circuit, (Ω)	Maximum case temperature rise ΔT, (°C)	Results	

**Supplementary information:**

- No fire or explosion
- No leakage
- Leakage
- Fire
- Explosion
- Bulge
- Others (please explain)

7.3.6	TABLE: Crush			N/A
Model	OCV at start of test, (Vdc)	OCV at removal of crushing force, (Vdc)	Results	

<b>Supplementary information:</b> <ul style="list-style-type: none"> <li>- No fire or explosion</li> <li>- No leakage</li> <li>- Leakage</li> <li>- Fire</li> <li>- Explosion</li> <li>- Bulge</li> <li>- Others (please explain)</li> </ul>
--

<b>7.3.8</b>	<b>TABLE: Overcharge</b>				<b>N/A</b>
Model	OCV prior to charging, (Vdc)	Maximum charge current, (A)	Time for charging, (hours)	Results	

<b>Supplementary information:</b> <ul style="list-style-type: none"> <li>- No fire or explosion</li> <li>- No leakage</li> <li>- Leakage</li> <li>- Fire</li> <li>- Explosion</li> <li>- Bulge</li> <li>- Others (please explain)</li> </ul>
--

<b>7.3.9</b>	<b>TABLE: Forced discharge (cells)</b>				<b>N/A</b>
Model	OCV before application of reverse charge, (Vdc)	Measured reverse charge $I_t$ , (A)	Time for reversed charge, (minutes)	Results	

<b>Supplementary information:</b> <ul style="list-style-type: none"> <li>- No fire or explosion</li> <li>- No leakage</li> <li>- Leakage</li> <li>- Fire</li> <li>- Explosion</li> <li>- Bulge</li> <li>- Others (please explain)</li> </ul>
--

8.2.1	TABLE: Continuous charging at constant voltage (cells)				P
Model	Recommended charging voltage $V_c$ , (Vdc)	Recommended charging current $I_{rec}$ , (A)	OCV at start of test, (Vdc)	Results	
Cell1#	4.20	0.57	4.20	P	
Cell 2#	4.20	0.57	4.20	P	
Cell 3#	4.20	0.57	4.20	P	
Cell 4#	4.20	0.57	4.20	P	
Cell 5#	4.20	0.57	4.20	P	
<b>Supplementary information:</b>					
<ul style="list-style-type: none"> <li>- No fire</li> <li>- No explosion</li> <li>- No leakage</li> </ul>					

8.3.1	TABLE: External short circuit (cells)					P
Model	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, ( $\Omega$ )	Maximum case temperature rise $\Delta T$ , (°C)	Results	
<b>Samples charged at charging temperature upper limit (45°C)</b>						
Cell 6#	24.8	4.21	0.091	109.1	P	
Cell 7#	24.8	4.21	0.097	118.0	P	
Cell 8#	24.8	4.21	0.094	109.3	P	
Cell 9#	24.8	4.10	0.093	117.3	P	
Cell 10#	24.8	4.20	0.088	114.2	P	
<b>Samples charged at charging temperature lower limit (10°C)</b>						
Cell 11#	24.7	4.13	0.096	111.1	P	
Cell 12#	24.7	4.12	0.079	110.1	P	
Cell 13#	24.7	4.12	0.094	107.6	P	
Cell 14#	24.7	4.13	0.098	110.8	P	
Cell 15#	24.7	4.11	0.095	115.9	P	
<b>Supplementary information:</b>						
<ul style="list-style-type: none"> <li>- No fire</li> <li>- No explosion</li> </ul>						

8.3.2	TABLE: External short circuit (Battery)					P
Model	Ambient, (°C)	OCV at start of test, (Vdc)	Resistance of circuit, ( $\Omega$ )	Maximum case temperature rise $\Delta T$ , (°C)	Results	
<b>Samples charged at charging temperature upper limit (45°C)</b>						
Battery 1#	55.0	4.15	0.080	55.6	P	
Battery 2#	55.0	4.14	0.091	55.8	P	
Battery 3#	55.0	4.13	0.085	55.3	P	
Battery 4#	55.0	4.15	0.078	55.9	P	
Battery 5#	55.0	4.15	0.098	55.3	P	
<b>Samples charged at charging temperature lower limit (10°C)</b>						
Battery 6#	54.2	4.09	0.093	55.5	P	
Battery 7#	54.2	4.08	0.097	55.6	P	
Battery 8#	54.2	4.09	0.099	55.9	P	
Battery 9#	54.2	4.07	0.091	55.4	P	
Battery 10#	54.2	4.08	0.076	55.2	P	
<b>Supplementary information:</b>						
- No fire						
- No explosion						

8.3.5	TABLE: Crush (cells)					P
Model	OCV at start of test, (Vdc)	OCV at removal of crushing force, (Vdc)	Width/diameter of cell before crush, (mm)	Required deformation for crush, (mm)	Results	
<b>Samples charged at charging temperature upper limit ( 45°C)</b>						
Cell 29#	4.15	4.15	--	--	P	
Cell 30#	4.14	4.14	--	--	P	
Cell 31#	4.15	4.15	--	--	P	
Cell 32#	4.15	4.15	--	--	P	
Cell 33#	4.15	4.15	--	--	P	
<b>NOTE:</b>						
A 13kN force applied at the cells.						
No voltage abrupt drop occurred.						
Supplementary information:						
- No fire or explosion						



8.3.6		TABLE: Over-charging of battery			P
Constant charging current (A).....:		5.7			—
Supply voltage (Vdc).....:		5			—
Model	OCV before charging, (Vdc)	Resistance of circuit, ( $\Omega$ )	Maximum outer casing temperature, ( $^{\circ}\text{C}$ )	Results	
Battery 14#	3.23	0.018	41.3	P	
Battery 15#	3.28	0.019	46.6	P	
Battery 16#	3.26	0.019	44.7	P	
Battery 17#	3.29	0.018	59.3	P	
Battery 18#	3.24	0.019	57.5	P	
Supplementary information: - No fire or explosion					

8.3.7		TABLE: Forced discharge (cells)			P
Model	OCV before application of reverse charge, (Vdc)	Measured Reverse charge $I_t$ , (A)	Time for reversed charge, (minutes)	Results	
Cell 34#	3.25	2.85	90	P	
Cell 35#	3.23	2.85	90	P	
Cell 36#	3.25	2.85	90	P	
Cell 37#	3.24	2.85	90	P	
Cell 38#	3.27	2.85	90	P	
Supplementary information: - No fire - No explosion					

8.3.8 T-5		TABLE: External short circuit (cells)				P
Model	Ambient, ( $^{\circ}\text{C}$ )	OCV at start of test, (Vdc)	Resistance of circuit, ( $\Omega$ )	Maximum case temperature rise $\Delta T$ , ( $^{\circ}\text{C}$ )	Results	
Cell 39#	55.4	4.20	0.089	106.6	P	
Cell 40#	55.4	4.20	0.085	114.3	P	
Cell 41#	55.4	4.20	0.082	110.4	P	
Cell 42#	55.4	4.19	0.073	115.8	P	
Cell 43#	55.4	4.19	0.073	118.1	P	

Cell 44#	55.3	4.19	0.095	101.2	P
Cell 45#	55.3	4.20	0.089	113.1	P
Cell 46#	55.3	4.20	0.093	116.4	P
Cell 47#	55.3	4.19	0.083	118.3	P
Cell 48#	55.3	4.19	0.086	119.1	P

**Supplementary information:**

The external short-circuit test of 10 pcs samples performed after the test of Altitude, Thermal cycling, Vibration and Shock in sequence.

- No fire
- No explosion

8.3.9	TABLE: Forced internal short circuit (cells)					N/A
Model	Chamber ambient, (°C)	OCV at start of test, (Vdc)	Particle location <sup>1)</sup>	Maximum applied pressure, (N)	Results	

**Supplementary information:**

1) Identify one of the following:

1: Nickel particle inserted between positive and negative (active material) coated area.

2: Nickel particle inserted between positive aluminium foil and negative active material coated area.

- No fire or explosion

--End of Report--

Type Designation: 113465  
Report No.: 17047573 001

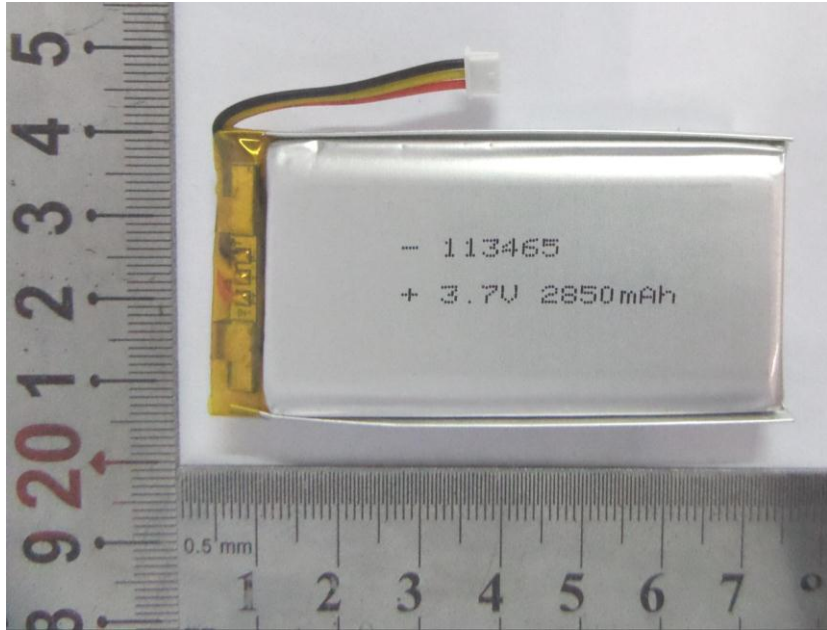


Figure 1 Front view of battery

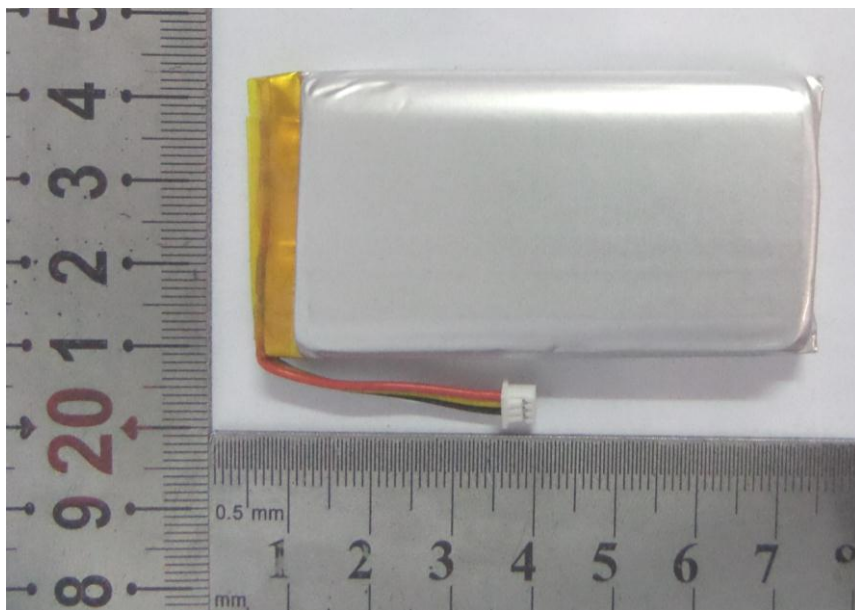


Figure 2 Back view of battery

Type Designation: 113465  
Report No.: 17047573 001

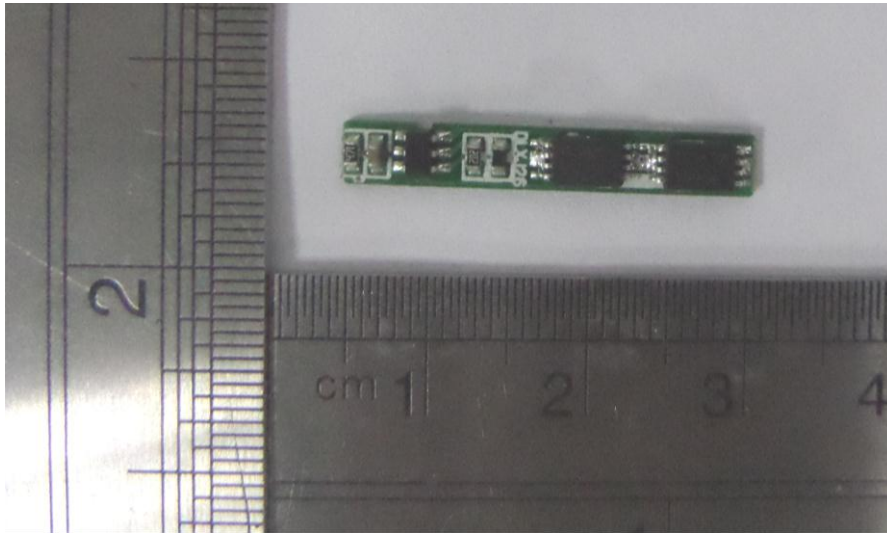


Figure 3 Component view of PCB

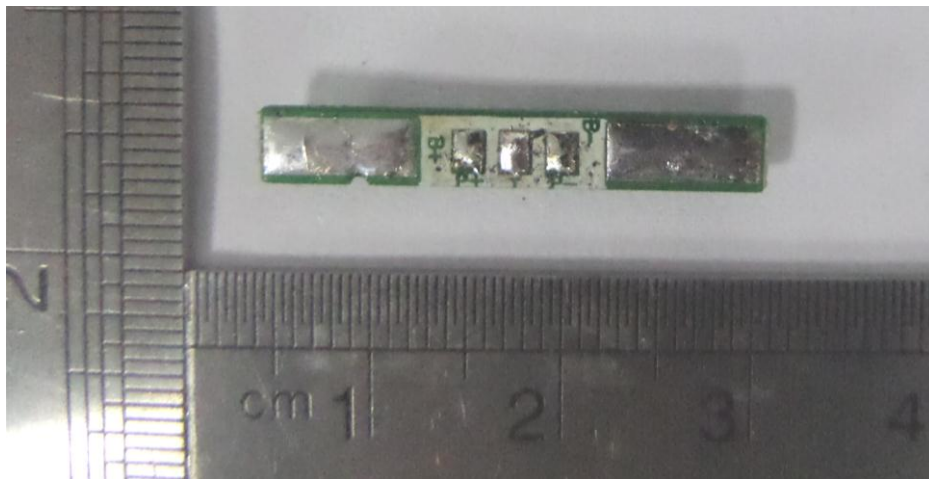


Figure 4 Trace view of PCB

Type Designation: 113465  
Report No.: 17047573 001

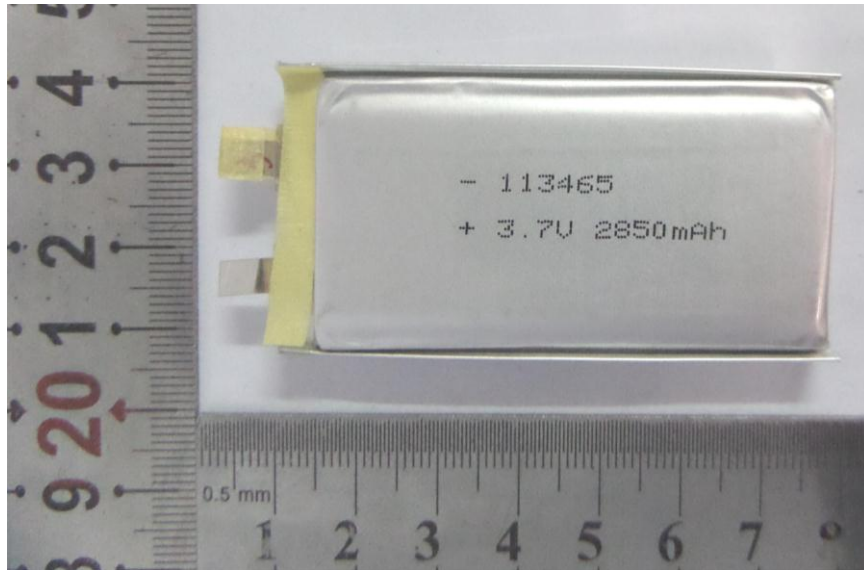


Figure 5 Front view of cell

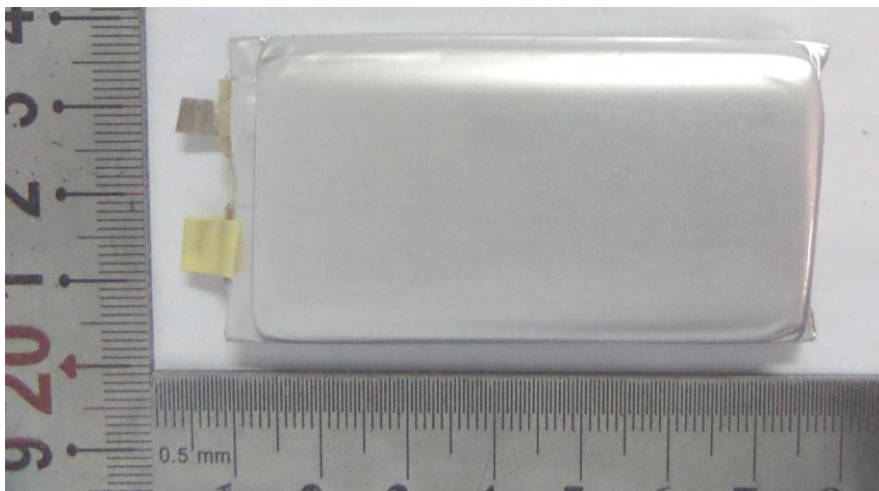


Figure 6 Back view of cell